


SERIES TAR TAR120 / 130 / 140 / 150 / 160 / 180 / 200

Model	TAR120	TAR130	TAR140	TAR150	TAR160	TAR180	TAR200
Cutting Width (mm)	1160	1260	1360	1460	1560	1760	1960
Weight (Kg)	360	390	410	420	425	460	480
Number of Knives	36	36	42	42	48	54	60
Number of Hammers	12	12	14	14	16	18	20
Max Cutting Diameter (mm)	60	60	60	60	60	60	60



Replaceable anti-wear slide adjustable to three positions to vary the cutting height.

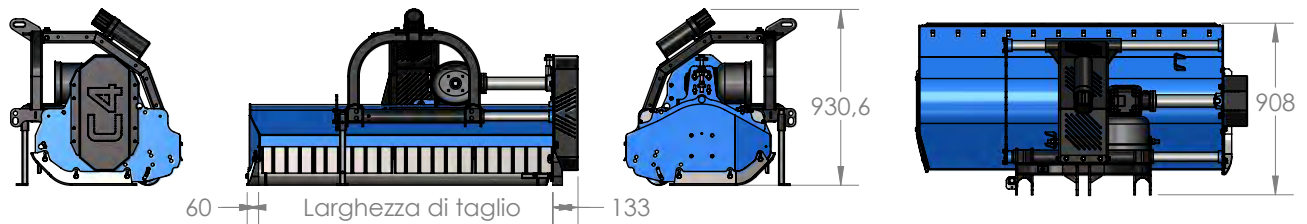

Three-point hitch
cat. I e in cat. II




Front protection with steel strips.
Rear support roller with height-adjustable
roller scraper.



Rotor can be equipped with knives for greater shredding
capacity and lower power requirement.
Rotor that can be equipped with hammers to safely deal with
branches and shrubs up to 60mm in diameter.




Hammer
Triple Knife

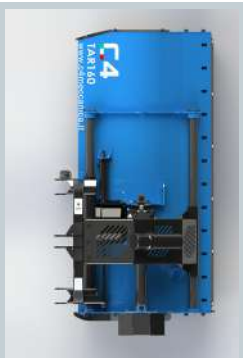

Attack with lateral translation of 330mm The translation is
manual with stop on 6 different positions.

Available as optional hydraulic translation with hydraulic
cylinder.

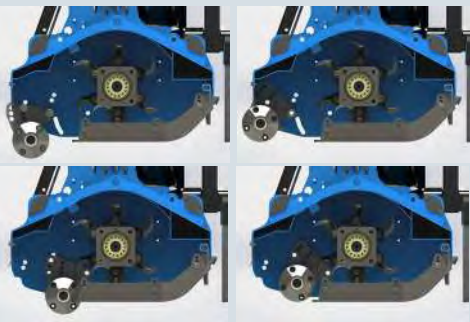

The rear idle roller can be configured in 6 distinct positions, which allow the volume and geometry of the case to be varied.

There are three height positions away from the rotor (to increase the cutting volume) and three height positions near the rotor (to decrease the cutting volume), this allows you to configure the machine according to the amount of material to be cut (and therefore of the required power) and of the size you want to obtain.



Possibility of rotating the hitch to mount the machine at the rear or at the front if the tractor is equipped with front lift and PTO.



Transmission made with gear box and belts, possibility of inverting the pulleys for operation at 540 rpm or 1000 rpm.