


SERIES TAP TAP160 / 180 / 200 / 220 / 240


Model	TAP160	TAP180	TAP200	TAP220	TAP240
Cutting Width (mm)	1600	1800	2000	2200	2400
Weight (Kg)	625	665	705	745	785
Number of Knives	54	54	60	66	72
Number of Hammers	18	18	20	22	24
Max Cutting Diameter (mm)	80	80	80	80	80




Replaceable anti-wear slide adjustable to three positions to vary the cutting height

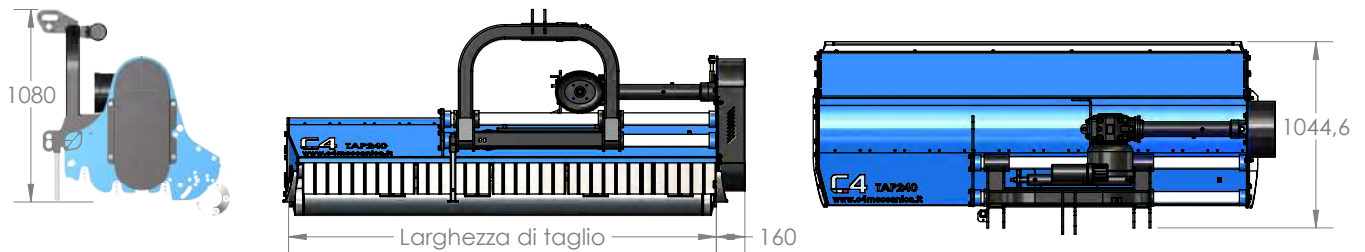

Three-point hitch
cat. I e in cat. II



Front protection with steel strips.
Rear support roller with height-adjustable
roller scraper.




Rotor can be equipped with knives for greater shredding
capacity and lower power requirement.
Rotor that can be equipped with hammers to safely deal
with branches and shrubs up to 60mm in diameter.



Hammer
Triple Knife



Hitch with 465mm side shift.
The translation is manual with stop on 6 different positions.
Available as optional hydraulic translation with hydraulic
cylinder.

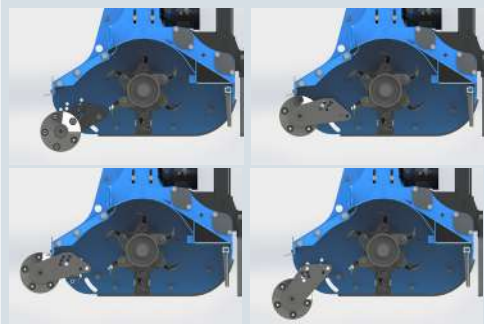

The rear idle roller can be configured in 6 distinct positions, which allow the volume and geometry of the case to be varied.

There are three height positions away from the rotor (to increase the cutting volume) and three height positions near the rotor (to decrease the cutting volume), this allows you to configure the machine according to the amount of material to be cut (and therefore of the required power) and of the size to be obtained.



Transmission made with gear box and belts, possibility of inverting the pulleys for operation at 540 rpm or 1000 rpm.