

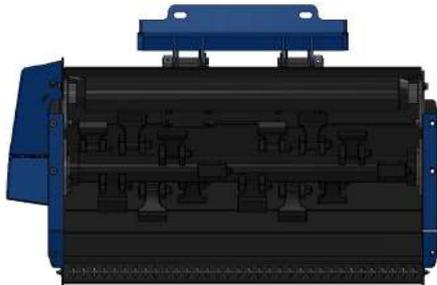


DMP SERIES

DMP100

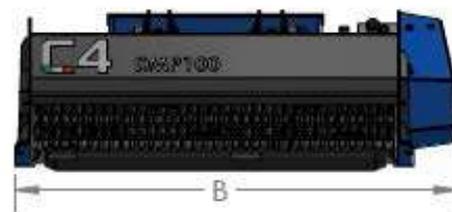

MODEL	DMP100
CUTTING WIDTH (mm)	1000
WEIGHT (Kg)	225
OIL PRESSURE (bar)	200
OIL FLOW (lt/min)	30-80
NUMBER OF KNIVES	48
NUMBER OF HAMMERS	16
MAX CUTTING DIAMETER (mm)	35
A DIMENSION (mm)	840
B DIMENSION (mm)	1270
C DIMENSION (mm)	450




Direct transmission with motor inside the machine protected from impacts and collisions. Standard with high pressure oil seal.



Fluidbox for complete and safe engine management, with maximum shockproof valve, anti-cavitation system and flow regulation to set the rotor speed correctly.



Replaceable wear-resistant skids.

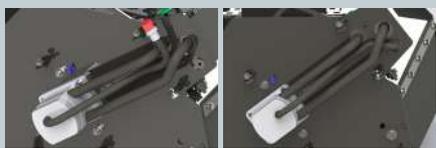

The machine comes standard in a two-pipe configuration, the fluidbox will manage the flow of oil coming from engine drainage. In the event that the back pressure at the discharge is greater than 8 bar, it's possible to provide for the third drainage tube for direct tank discharge.



Rotor can be equipped with knives for more shredding capacity and lower power requirement. Three-bladed knives set. Rotor can be equipped with hammers for safely tackle shrubs up to 35mm in diameter.



Rear support roller adjustable in three positions for cutting height adjustment.



Oscillating bolted attachment system for compact track loaders with slotted pins, allows you to easily overcome and accommodate uneven ground.