

A = 2600 mm

B = 1300 mm

C = 2200 mm

D = 1440 mm

TMU40

AIR FILTER	High Capacity Cartridge - Cyclone Prefilters
ELECTRICAL SYSTEM	12V CC
DIESEL TANK	60 l
MAX SPEED	1st gear 4.5 km / h - 2nd gear 9 km / h
SLOPE WITH OPERATOR	20°
SLOPE WITHOUT OPERATOR	55°
OPERATING WEIGHT	2080 Kg

ENGINE

MODEL	Yanmar 3TNV86CT
DISPLACEMENT / N ° CYLINDERS	1.568cc/3
MAX POWER	40 cv/30 kW
EMISSIONS	Eu Stage V
BIODEGRADABLE OIL	Optional

HYDRAULIC SYSTEM

TYPE	Closed-Loop
MAX PRESSURE ON PTO	320 Bar
MAX FLOW ON PTO	55 l/min
TANK CAPACITY	40 l
BIODEGRADABLE OIL	Optional

REMOTE CONTROL

BRAND	Imet
WORKING FREQUENCY	433.050-434.790 MHz e 2,4 GHz
RANGE OF ACTION	100 m
JOYSTICK	Proportional
BATTERY	Double rechargeable battery
BATTERY CHARGER	On-board
STANDARD EQUIPMENT	3 batteries
DISPLAY	4,3" color



ACCESSORIES

TRF115 - TRF135

FOREST MULCHER FOR REMOTE-CONTROLLED TOOL HOLDER

The TRF forestry mulcher series has been designed to guarantee maximum robustness and reliability in shredding shrubs, branches and undergrowth management.

TECHNICAL FEATURES	TRF115	TRF135
CUT WIDTH (mm)	1150	1350
WEIGHT (Kg)	500	540
PRESSURE (bar)	320	320
OIL FLOW (l/min)	50	50
NUMBER OF TOOLS	24	32
MAX CUTTING DIAMETER (mm)	150	150
AVAILABLE WITH 3 TYPES OF TOOLS: Standard / Plus / New		
AVAILABLE AS OPTIONAL: Cutting depth reducer		



COMPONENTS


Fixed tooth rotor with depth reducer	Oscillating attachment with return spring and mechanical stop
Hydraulic abatement arch adjustable on the machine	Transmission with 5 belts
Hydraulic front hatch	Hydraulic piston motor mounted on bearing extension
Bellows system for the inclination of the equipment	

TRL135 - TRL155

MULCHER FOR REMOTE-CONTROLLED TOOL CARRIER

Shredder with mobile hammer / knives, thanks to its low weight and dimensions, it guarantees maximum manageability when shredding grass and shrubs.

TECHNICAL FEATURES	TRL135	TRL155
CUT WIDTH (mm)	1350	1550
WEIGHT (Kg)	340	375
PRESSURE (bar)	320	320
OIL FLOW (l/min)	50	50
NUMBER OF TOOLS	16	20
MAX CUTTING DIAMETER (mm)	70	70
AVAILABLE WITH 2 TYPES OF TOOLS: Hammers / Knives		

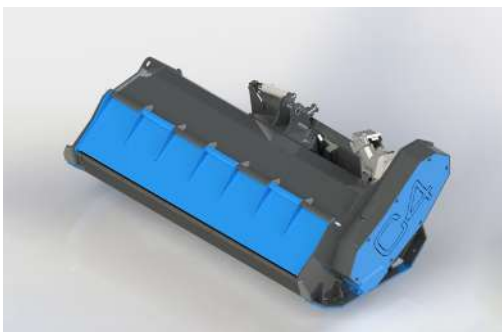

COMPONENTS

Rotor that can be equipped with hammers or knives	Hydraulic piston motor mounted on bearing extension
Oscillating attachment with return spring and mechanical stop	Replaceable wear-resistant skids
Transmission with 3 belts	Rear idler roller with rubber protection

ACCESSORIES

TRS115 - TRS135

THE MULCHERS OF THE TRS RANGE

are multipurpose machines that allow you to operate both on grassy surfaces and on shrubs and branches up to 100 mm in diameter.

TECHNICAL FEATURES	TRS115	TRS135
CUT WIDTH (mm)	1150	1350
WEIGHT (Kg)	443	487
PRESSURE (bar)	320	320
OIL FLOW (l/min)	50	50
NUMBER OF TOOLS	16	24
MAX CUTTING DIAMETER (mm)	100	100

AVAILABLE AS OPTIONAL:
Hydraulic abatement arch




CR80

TRENCHER FOR REMOTE-CONTROLLED TOOL HOLDER

Equipment that allows the excavation of traces on the ground for the laying of fences or underground services. Generously sized tool chain equipped with interchangeable tips in wear-resistant material. Furrow cleaning share as standard.

TECHNICAL FEATURES	CR80
ADJUSTABLE SUPPORT SLIDE ON 3 DIGGING DEPTH (mm)	400-600-800
DIGGING WIDTH (mm)	min 120 / max 200
WEIGHT (Kg)	270

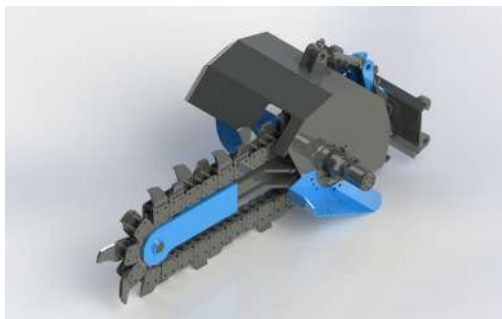


PDR150

BRUSHCUTTER PLATE FOR REMOTE CONTROLLED TOOL HOLDER

Brushcutter with 2 counter-rotating blades. Equipped with rear roller and front idle wheels adjustable in height. Mulching technology for shredding the material.

TECHNICAL FEATURES	CR80
ADJUSTABLE CUTTING HEIGHT	da 12 a 85 mm
WIDTH OF CUT	1500 mm
DISCS DIAMETER (mm)	800
WEIGHT (Kg)	280

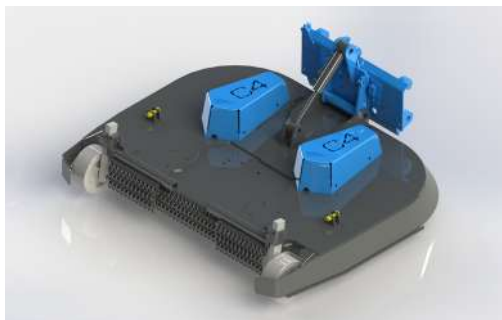

ACCESSORIES

TN140

SNOW BLOWER

Hydraulically operated snow blower used for removing snow from streets, sidewalks, roadways etc. A two-stage machine with ice-breaking blades and a turbine for throwing snow.

TECHNICAL FEATURES	TN140
WORKING WIDTH (mm)	1400
WORKING HEIGHT (mm)	700
CUTTING DIAMETER (mm)	390
WEIGHT (Kg)	255
CHUTE MAX HEIGHT (mm)	1680
CHUTE ROTATION	Hydraulic



BT30

SHREDDER

Drum shredder for volume reduction of branches, prunings, grass clippings and woody materials. It is equipped with a spout for unloading the material on cargo beds or trailers.

TECHNICAL FEATURES	BT30
FEEDING WIDTH (mm)	300
MAX CUTTING DIAMETER (mm)	80
UNLOADING HEIGHT (mm)	1550
NO. KNIVES	2
WEIGHT (Kg)	205



BF208 - BF238

CUTTER BAR

Double-movement toothed cutter bar for mowing grass/fodder for later drying in the field.

TECHNICAL FEATURES	BF208	BF238
WORKING WIDTH (mm)	2080	2380
HEIGHT (mm)	350	350
WEIGHT (Kg)	110	130




ACCESSORIES

VI37

AUXILIARY WINCH

Hydraulic rescue winch attached to the back of the frame for retrieving the machine if the tracks lose grip on the ground. It is equipped with a side opening system to facilitate maintenance operations.

TECHNICAL FEATURES	VI37
MAX PULLING FORCE (Kgf)	3700
ROPE LENGHT (m)	40
ROPE DIAMETER (mm)	10
WEIGHT (Kg)	140

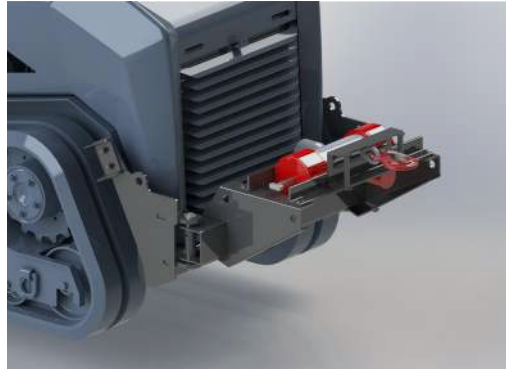

PALLET FORKS

PALLET FORKS

Front pallet forks adjustable in width and in inclination for handling loads on pallets. They are equipped with a parallelogram system to maintain constant inclination during the loading and the unloading.

TECHNICAL FEATURES	
MAX FORKS WIDTH (mm)	1000
FORKS LENGHT (mm)	900
MAX LIFTING WEIGHT (Kg)	350Kg - 400mm
LIFTING HEIGHT (mm)	500
WEIGHT (Kg)	130

